


P5 MM

INDOOR NOVASTAR

- Turn-key solution.
- Easy installation.
- Ground support compatible.
- Technical support available.
- 3 years warranty included for all parts.
- USA based.
- In stock. Ships immediately.

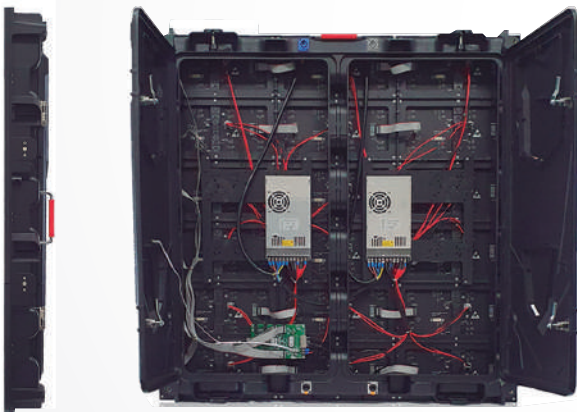

TECHNICAL SPECIFICATIONS


PIXEL PITCH	P5 mm
LED ENCAPSULATION	King-Light SMD2020
PIXEL DENSITY	192 x 192
SIZE	960 x 960 x 80mm / 37.9" x 37.9" x 3"
CHIP	IC2053
HIGH REFRESH RATE	3840hz
WEIGHT	45 lbs./ 21 Kg
RECEIVING CARD	NovaStar

POWER SUPPLY

OPERATION POWER	100~240V 50-60Hz
MAX. POWER CONSUMPTION	425W/per panel
AVE. POWER CONSUMPTION	240W/per panel
CONNECTIONS POWER/DATA	Power-PowerCon In/Out; Data EtherCon In/Out

OPTICAL RATINGS

BRIGHTNESS	3500 NITS
PROTECTION RATE	IP45
SCAN	1/16
FRAME FREQUENCY	60 Hz
VIEW ANGLE	Horizontal 140°/Vertical 140°
OPTIMAL VIEW DISTANCE	16 ft (5m)
BRIGHTNESS ADJUSTMENT	0~100% 100 Levels

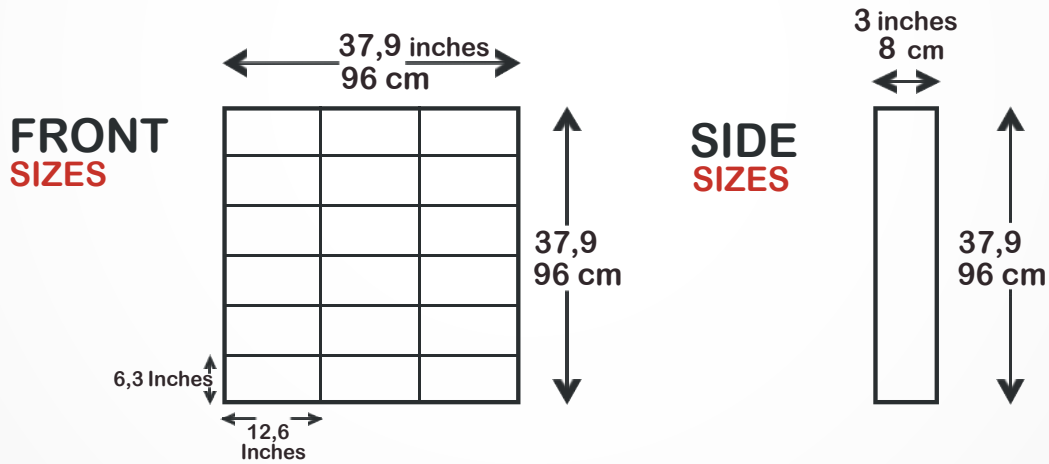

VIEWING DISTANCE

