

OUTDOOR LED PANELS

P5mm

OUTDOOR NOVASTAR IP65

Back Service

- Turn-key solution.
- Easy installation.
- Ground support compatible.
- Technical support available.
- 3 years warranty included for all parts.
- USA based.
- In stock. Ships immediately.

3840HZ

HIGH REFRESH RATE

4K

4K RESOLUTION




FIXED & RENTAL CABINETS



IP65 / WATER RESISTANT


FRONT

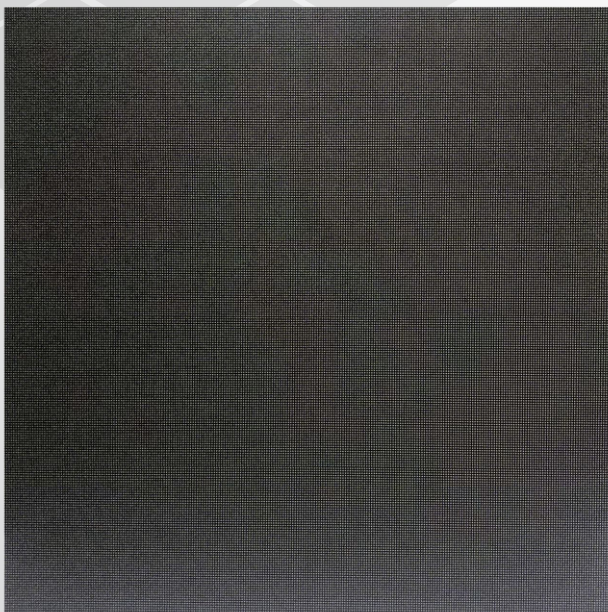

BACK




HANGING BAR: FRONT

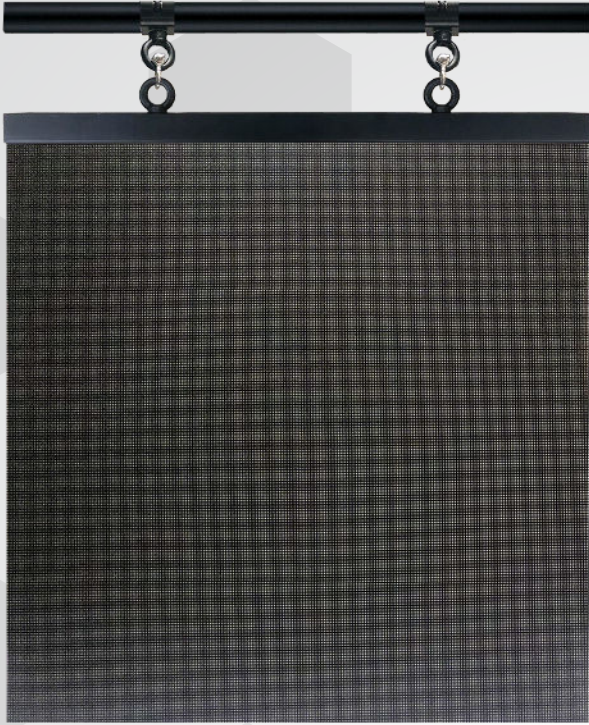

HANGING BAR: BACK



BACK: SERVICE PANEL

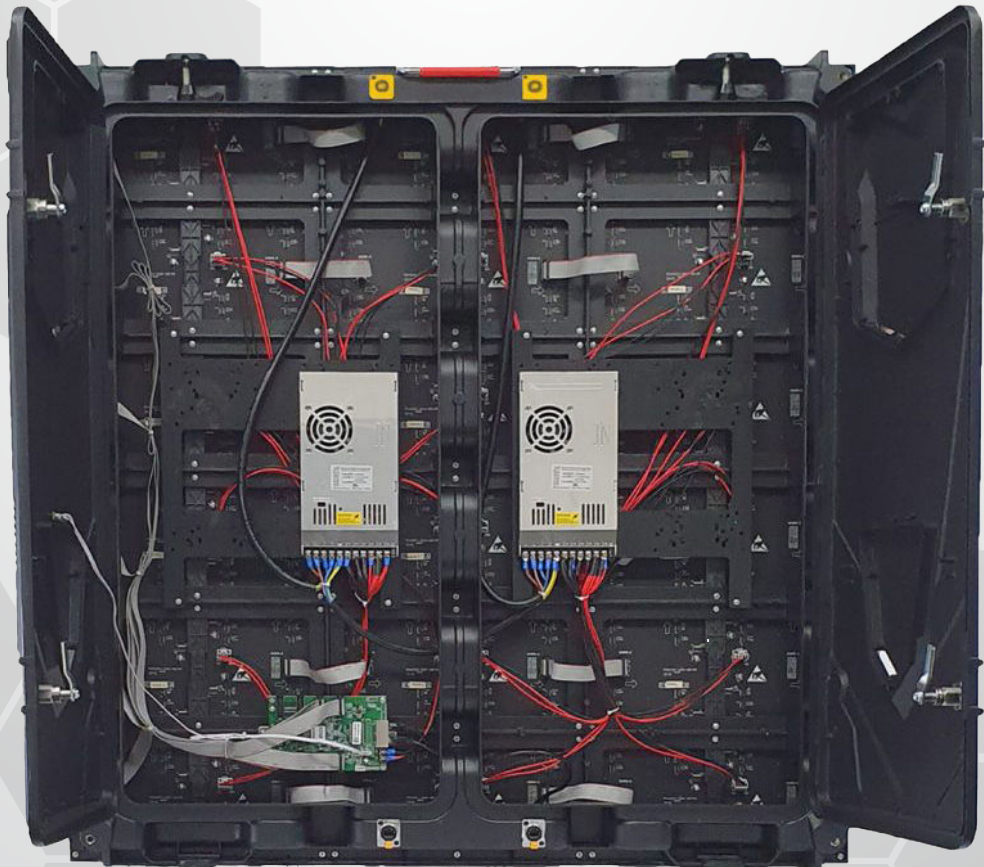

TECHNICAL SPECIFICATIONS

PIXEL PITCH	P5mm
LED ENCAPSULATION	3-in-1 SMD3535 LED / Nationstar Encapsulation
PIXEL DENSITY	192 x 192
SIZE	960 x 960 x 80mm / 37.9" x 37.9" x 3"
CHIP	IC2053
HIGH REFRESH RATE	3840hz
WEIGHT	55 lbs / 25 kg
RECEIVING CARD	NovaStar MRV-328

POWER SUPPLY


OPERATION POWER	100~240V 50-60Hz
MAX. POWER CONSUMPTION	500W/per panel
AVE. POWER CONSUMPTION	300W/per panel
CONNECTIONS POWER/DATA	Power-PowerCon In/Out; Data EtherCon In/Out

OPTICAL RATINGS


BRIGHTNESS	5500 NITS
PROTECTION RATE	IP65
SCAN	1/8
FRAME FREQUENCY	3840 Hz
VIEW ANGLE	Horizontal 140°/Vertical 140°
OPTIMAL VIEW DISTANCE	16 ft (5m)
BRIGHTNESS ADJUSTMENT	0~100% 100 Levels

DIMENSIONS

FRONT DIMENSIONS

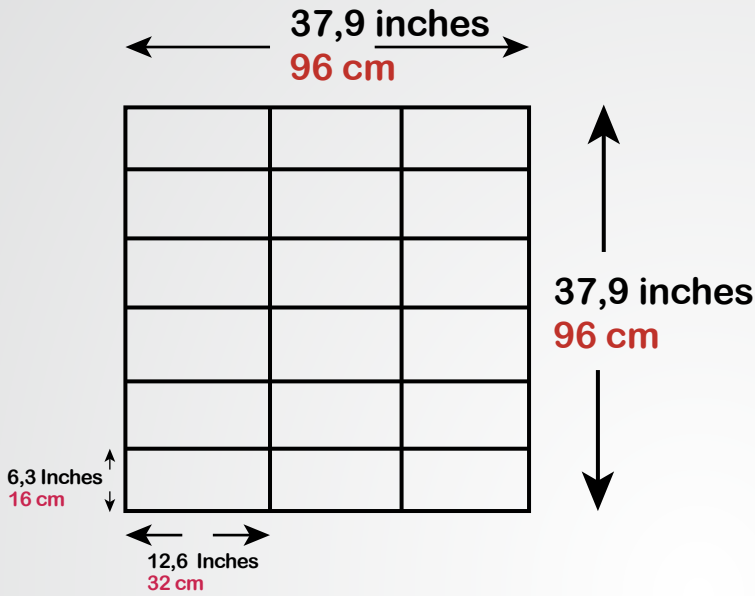

SIDE DIMENSIONS

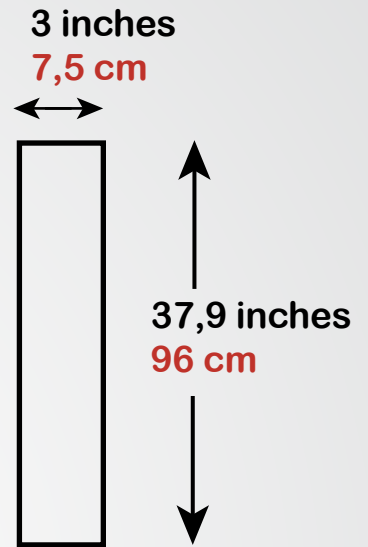

VIEWING DISTANCE

8	Pixel Pitch (mm)	5.9	3.9	2.9	1.9	1.5	1.2	0.9
26 ft.	Optimal Viewing Distance	16 ft.	8 ft.	6 ft.	5 ft.	4 ft.	3 ft.	2 ft.

