


INDOOR LED PANELS

P1.9mm

INDOOR NOVASTAR

Front Service / Back Service / Wall Mount

- Turn-key solution.
- Easy installation.
- Ground support compatible.
- Technical support available.
- 3 years warranty included for all parts.
- USA based.
- In stock. Ships immediately.



FRONT SERVICEABLE

FRONT

3840HZ

HIGH REFRESH RATE

4K

HIGH RESOLUTION



FIXED & RENTAL CABINETS




INDOOR



WALL MOUNTABLE

BACK

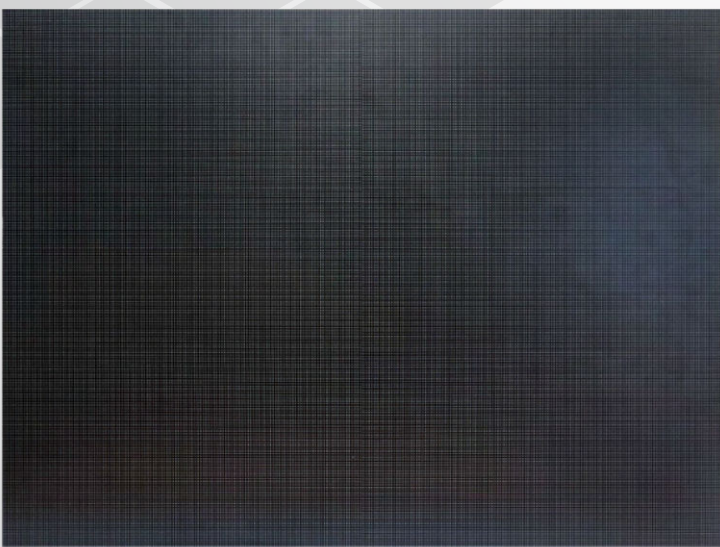


HANGING BAR: FRONT



HANGING BAR: BACK



FRONT SERVICEABLE

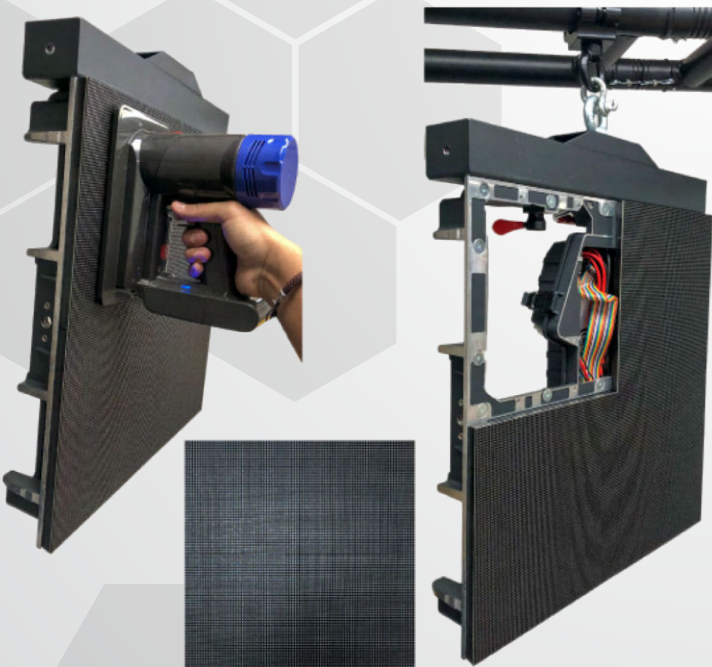

WALL MOUNTABLE



TECHNICAL SPECIFICATIONS

PIXEL PITCH	P1.99 mm
LED ENCAPSULATION	King-Light SMD1515
PIXEL DENSITY	320 x 240
SIZE	640 x 480 x 75mm / 25.2" x 18.9" x 3"
CHIP	IC2153
HIGH REFRESH RATE	3840hz
WEIGHT	21.6 lbs / 9.8 kg
RECEIVING CARD	NovaStar MRV-366

POWER SUPPLY


OPERATION POWER	100~240V 50-60Hz
MAX. POWER CONSUMPTION	200W/per panel
AVE. POWER CONSUMPTION	120W/per panel
CONNECTIONS POWER/DATA	Power-PowerCon In/Out; Data EtherCon In/Out

OPTICAL RATINGS


BRIGHTNESS	800 NITS
PROTECTION RATE	IP45
SCAN	1/40
FRAME FREQUENCY	60 Hz
VIEW ANGLE	Horizontal 160°/Vertical 160°
OPTIMAL VIEW DISTANCE	5 ft (1.5m)
BRIGHTNESS ADJUSTMENT	0~100% 100 Levels

DIMENSIONS

FRONT DIMENSIONS

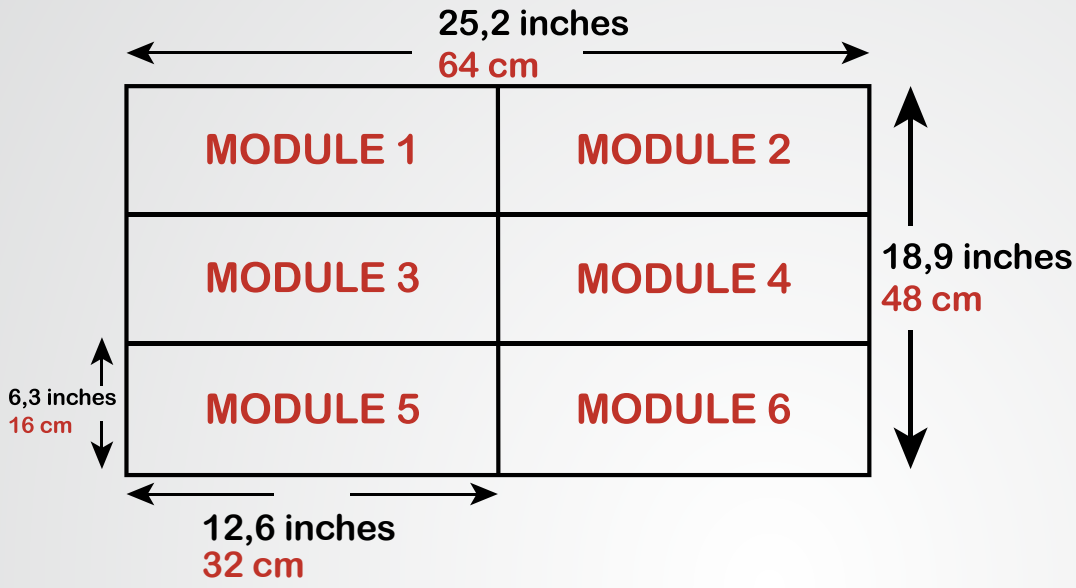

SIDE DIMENSIONS

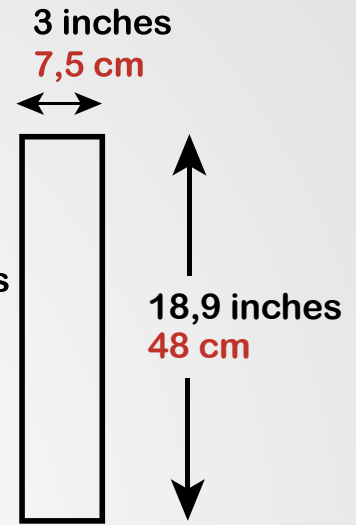

VIEWING DISTANCE

8	Pixel Pitch (mm)	5.9	3.9	2.9	1.9	1.5	1.2	0.9
26 ft.	Optimal Viewing Distance	20 ft.	8 ft.	6 ft.	5 ft.	4 ft.	3 ft.	2 ft.

