


INDOOR LED PANELS

P2.5mm

INDOOR NOVASTAR

Front Service / Back Service / Wall Mount

- Turn-key solution.
- Easy installation.
- Ground support compatible.
- Technical support available.
- 3 years warranty included for all parts.
- USA based.
- In stock. Ships immediately.



FRONT SERVICEABLE

FRONT



HIGH REFRESH RATE



HIGH RESOLUTION



FIXED & RENTAL CABINETS


BACK



INDOOR



WALL MOUNTABLE

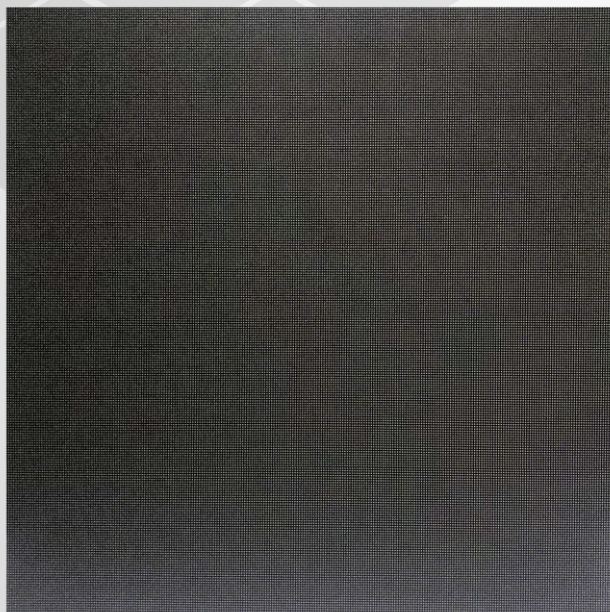




HANGING BAR: FRONT



HANGING BAR: BACK



FRONT SERVICEABLE

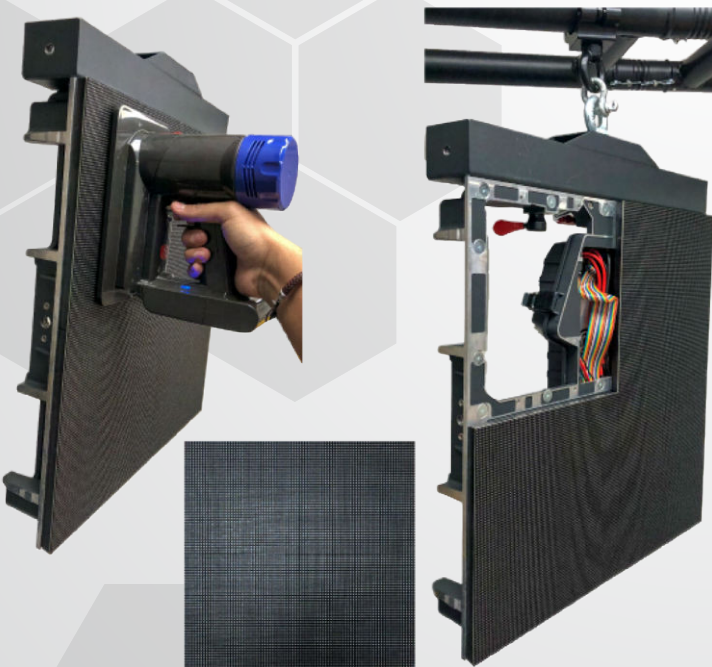

WALL MOUNTABLE



## TECHNICAL SPECIFICATIONS

<b>PIXEL PITCH</b>	P2.5mm
<b>LED ENCAPSULATION</b>	King-Light SMD2020
<b>PIXEL DENSITY</b>	256 x 256
<b>SIZE</b>	640 x 640 x 75 mm / 25.2" x 25.2" x 3"
<b>CHIP</b>	IC5123
<b>HIGH REFRESH RATE</b>	3840hz
<b>WEIGHT</b>	21.4 lbs / 9.7 kg
<b>RECEIVING CARD</b>	NovaStar MRV-328

## POWER SUPPLY


<b>OPERATION POWER</b>	100~240V 50-60Hz
<b>MAX. POWER CONSUMPTION</b>	150W/per panel
<b>AVE. POWER CONSUMPTION</b>	100W/per panel
<b>CONNECTIONS POWER/DATA</b>	Power-PowerCon In/Out; Data EtherCon In/Out

## OPTICAL RATINGS


<b>BRIGHTNESS</b>	1500 NITS
<b>PROTECTION RATE</b>	IP45
<b>SCAN</b>	1/32
<b>FRAME FREQUENCY</b>	60 Hz
<b>VIEW ANGLE</b>	Horizontal 160°/Vertical 160°
<b>OPTIMAL VIEW DISTANCE</b>	5 ft (1.5m)
<b>BRIGHTNESS ADJUSTMENT</b>	0~100% 100 Levels

# DIMENSIONS

## FRONT DIMENSIONS

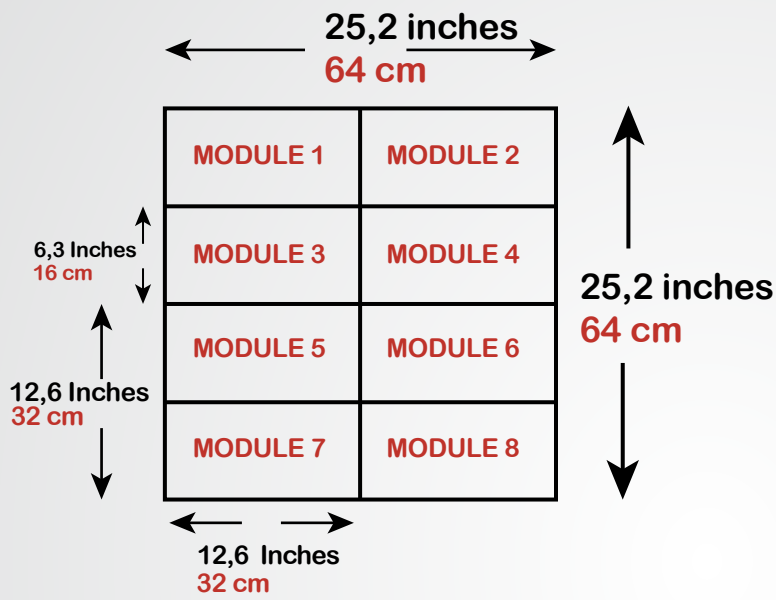

## SIDE DIMENSIONS

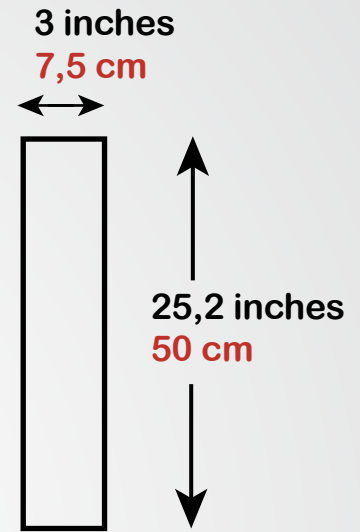

# VIEWING DISTANCE

8	Pixel Pitch (mm)	5.9	3.9	2.9	1.9	1.5	1.2	0.9
26 ft.	Optimal Viewing Distance	20 ft.	8 ft.	6 ft.	5 ft.	4 ft.	3 ft.	2 ft.

