

INDOOR LED PANELS

P3.9mm DOUBLE

INDOOR NOVASTAR

Front Service / Back Service / Wall Mount

- Turn-key solution.
- Easy installation.
- Ground support compatible.
- Technical support available.
- 3 years warranty included for all parts.
- USA based.
- In stock. Ships immediately.



FRONT SERVICEABLE

FRONT

3840HZ

HIGH REFRESH RATE



4K RESOLUTION



FIXED & RENTAL CABINETS




INDOOR




WALL MOUNTABLE

BACK

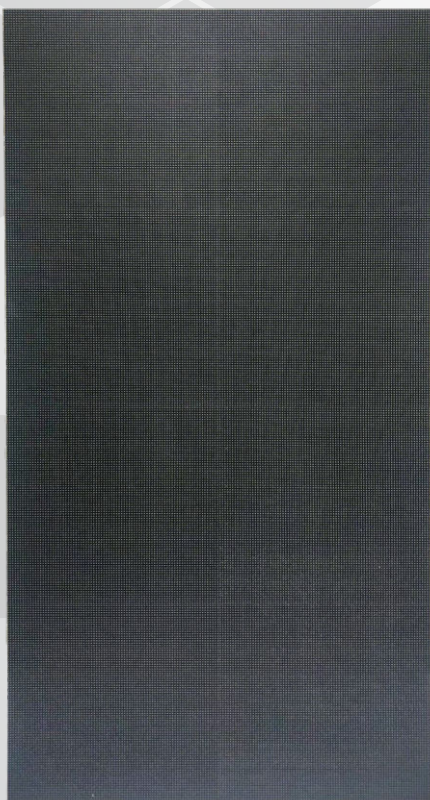


HANGING BAR: FRONT

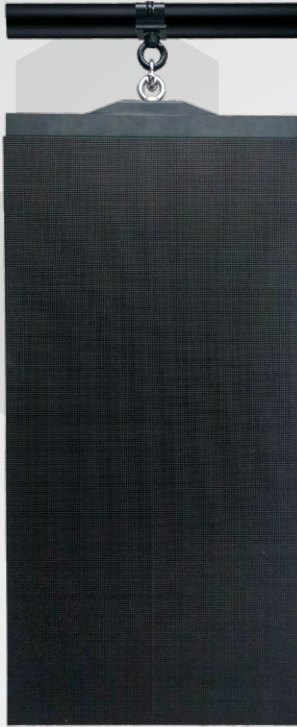


HANGING BAR: BACK



FRONT SERVICEABLE

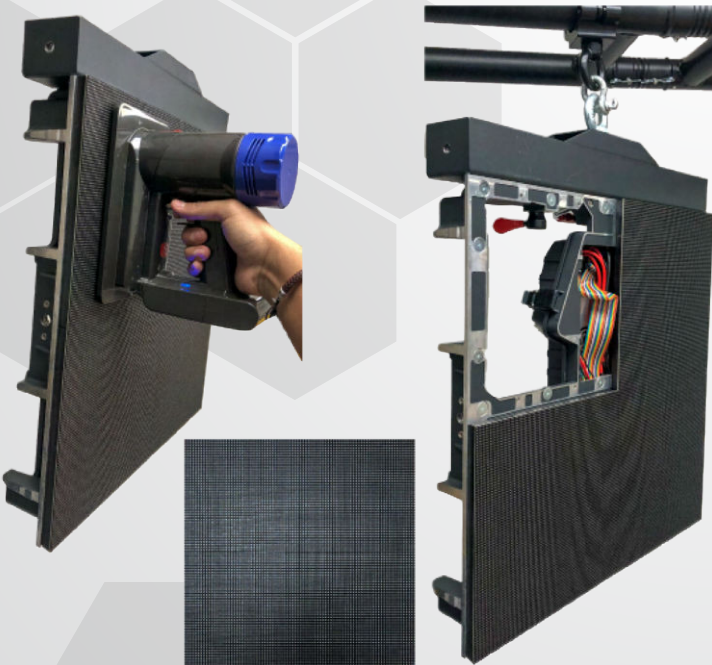

WALL MOUNTABLE

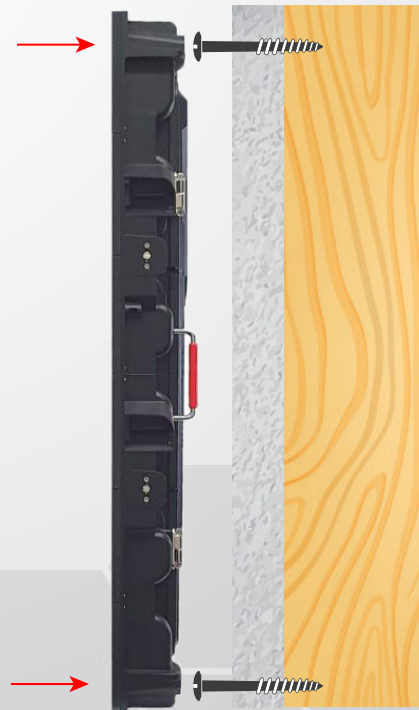

TECHNICAL SPECIFICATIONS

PIXEL PITCH	P3.91mm
LED ENCAPSULATION	King-Light SMD2020
PIXEL DENSITY	128 x 256
SIZE	500 x 1000 x 75 mm / 19.7" x 39.4" x 3"
CHIP	IC2153
HIGH REFRESH RATE	3840hz
WEIGHT	32 lbs / 15 kg
RECEIVING CARD	NovaStar MRV-A5

POWER SUPPLY


OPERATION POWER	100~240V 50-60Hz
MAX. POWER CONSUMPTION	200W/per panel
AVE. POWER CONSUMPTION	120W/per panel
CONNECTIONS POWER/DATA	Power-PowerCon In/Out; Data EtherCon In/Out

OPTICAL RATINGS


BRIGHTNESS	4500 NITS
PROTECTION RATE	IP45
SCAN	1/16
FRAME FREQUENCY	3840 Hz
VIEW ANGLE	Horizontal 140°/Vertical 140°
OPTIMAL VIEW DISTANCE	8 ft (2.4m)
BRIGHTNESS ADJUSTMENT	0~100% 100 Levels

DIMENSIONS

FRONT SIZES

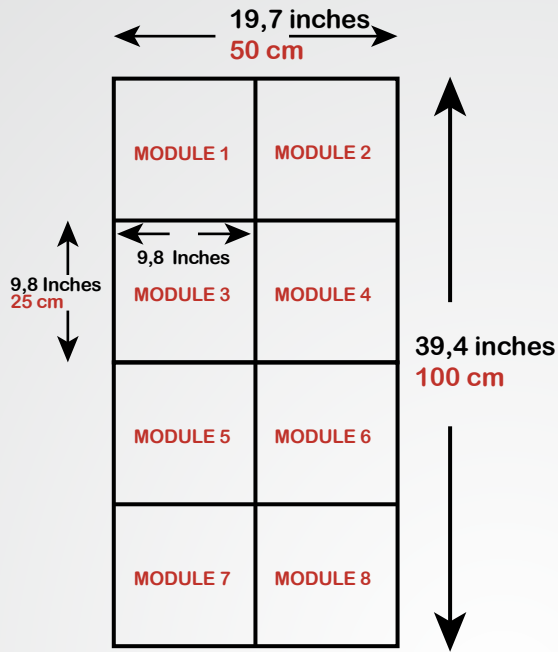

SIDE SIZES

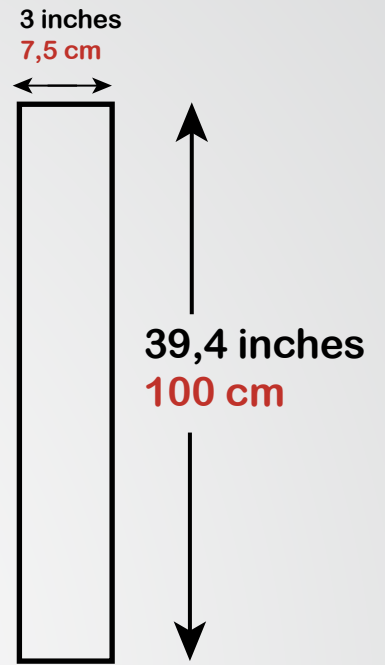

VIEWING DISTANCE

8	Pixel Pitch (mm)	5.9	3.9	2.9	1.9	1.5	1.2	0.9
26 ft.	Optimal Viewing Distance	20 ft.	8 ft.	6 ft.	5 ft.	4 ft.	3 ft.	2 ft.

