



LED MARKET

Official Reseller  MIRACKLE

3.0 INDOOR IP45
MM
960x960

VIEW PACKAGES ONLINE





3-year warranty
for all parts.



US-Based
Company

960 × 960

INDOOR LED SCREEN PANEL **P3.07**



INDOOR
LED PANEL



HIGH REFRESH
RATE



HIGHER
RESOLUTION



FIXED & RENTAL
CABINETS



FRONT
SERVICEABLE



WALL
MOUNTABLE

3.0MM

INDOOR
LED PANEL

— 960x960 —




HIGHLIGHTED COMPONENTS



3.0MM

INDOOR
LED PANEL

— 960x960 —

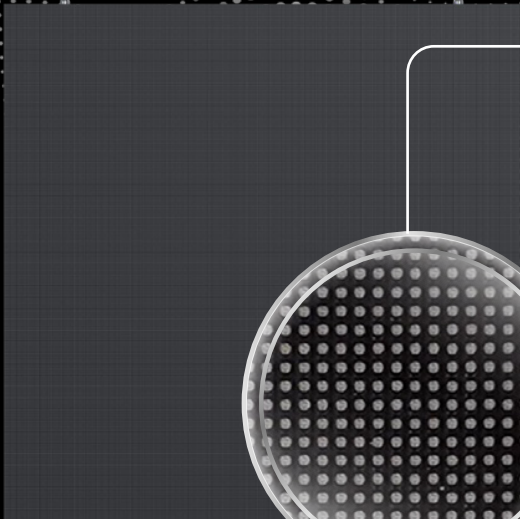

HIGHLY COST-EFFECTIVE

With 8 magnetic modules, this LED panel seamlessly combines fine pixel pitch with high refresh rate, plus it is an eco-friendly product.

WATCH VIDEO

TECHNICAL SPECIFICATIONS

PIXEL PITCH	3.07mm
LED ENCAPSULATION	SMD2020
PIXEL DENSITY	312 x 312
SIZE	960 x 960 x 90 mm / 37.8" x 37.8" x 3.5"
CHIP	ICN1065
HIGH REFRESH RATE	3840hz
WEIGHT	52 lb / pc - 23.5 kg
RECEIVING CARD	NovaStar MRV412-N



TURN-KEY SOLUTIONS

LED video walls packages in stock, ready to ship immediately across the USA.



EASY INSTALLATION

Connect the power cable, your HDMI device to the video processor and the ethernet port.



TECHNICAL SUPPORT


We have online support with video tutorials, software, user guides and specialized team.

3.0MM
— 960x960 —

INDOOR
LED PANEL



FRONT/BACK SERVICE

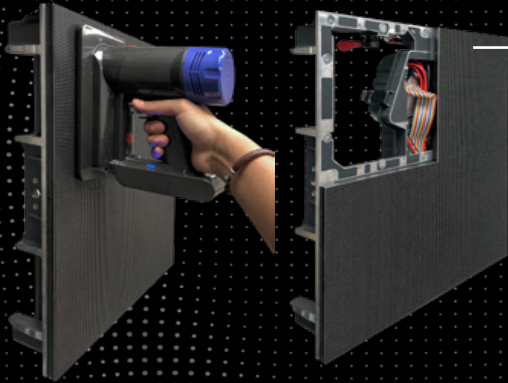

FRONT SERVICEABLE

Magnetic module system

Our magnetic module system is designed to simplify the assembly, repair, and replacement of LED display components. Each module is equipped with strong magnets, allowing for quick and tool-free installation. Modules can be easily removed manually or with a special tool, ensuring hassle-free maintenance and minimizing downtime.

POWER SUPPLY

Slim bar with noiseless technology.



RECEIVING CARD

MRV412-N NovaStar 3840Hz

By NovaStar, single MRV412-N loads up to 512x512 pixels. Supporting various functions such as color management, 18Bit+, pixel level brightness and chroma calibration, individual Gamma adjustment RGB, and 3D.




3.0MM

INDOOR
LED PANEL

— 960x960 —



PANEL DIMENSIONS

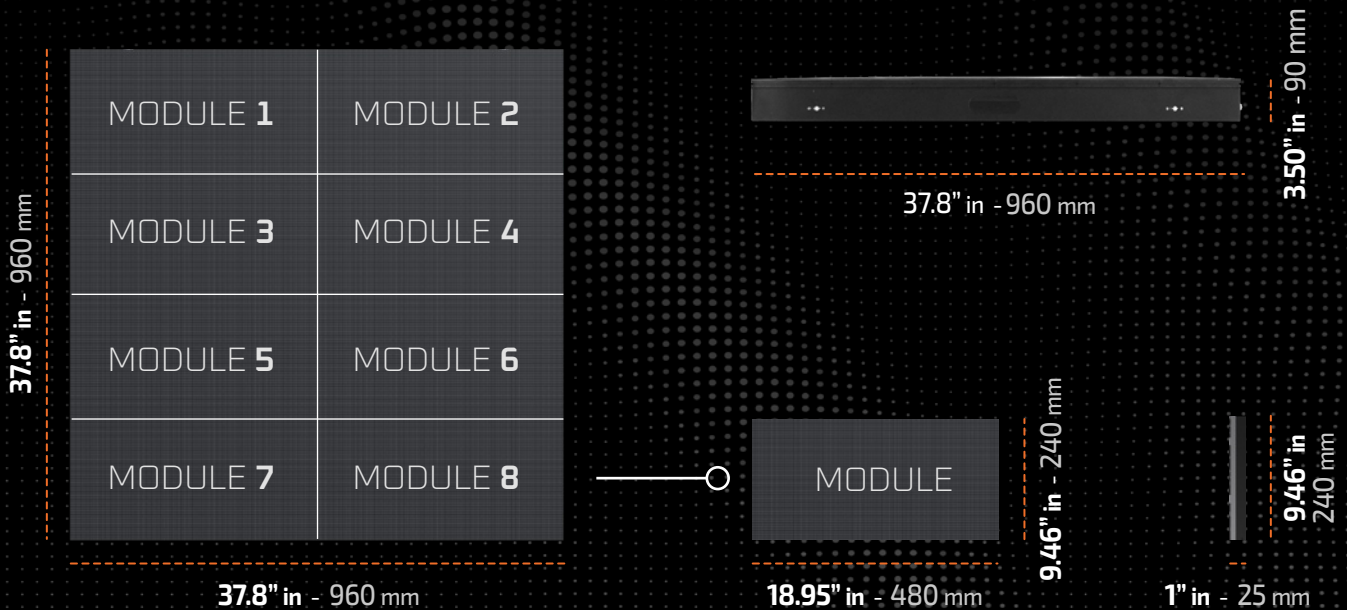


INSTALLATION METHODS



WALL MOUNT

The most stable option, secured through pre-drilled holes in Miracle® LED panels for reliable installation.

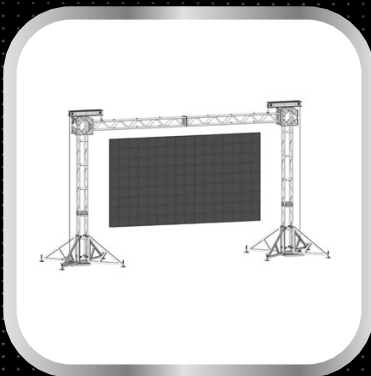

RIGGING

Modular structures with bar and ladder designs, offering height and flexibility configurations. Compatible with all Miracle® LED panels.



FREE STANDING

Durable aluminum construction, ideal for overhead truss systems, ceiling grids, cranes, or similar setups. Fully compatible with Miracle® LED panels.

[WATCH VIDEO](#)

3.0MM
— 960x960 —


INDOOR
LED PANEL



VIEWING DISTANCE

WATCH VIDEO

PIXEL PITCH (MM)	5.0	4.8	3.9	3.0	2.5	1.9	1.8	1.5
MIN. VIEW DISTANCE	25 FT.	20 FT.	15 FT.	10 FT.	6 FT.	5 FT.	4 FT.	3 FT.



OPTICAL RATINGS

BRIGHTNESS	1000 NITS
PROTECTION RATE	IP43
SCAN	1/26S
FRAME FREQUENCY	60 Hz
VIEW ANGLE	Horizontal 140°/Vertical 120°
MINIMUM VIEWING DISTANCE	10 ft (3 m)
BRIGHTNESS ADJUSTMENT	0~100% 100 Levels

POWER SUPPLY

OPERATION POWER	100~240V 50-60Hz
MAX. POWER CONSUMPTION	400W/pc
AVE. POWER CONSUMPTION	120W/per panel
CONNECTIONS POWER/DATA	Power-PowerCon In/Out; Data EtherCon In/Out

3.0MM
— 960x960 —

INDOOR
LED PANEL



LED MARKET

Official Reseller  MIRACKLE



CONTACT US



WWW.LEDMARKETUSA.COM



INFO@LEDMARKETUSA.COM



2125 BISCAYNE BLVD, SUITE 272
MIAMI, FL, 33137



+1 (888) 204-8885



LEDMARKETUSA



LEDMARKETUSA



LEDMARKETUSA